

# Kinghelm®

项目 Mapx	设计内容 Modification	日期 Date	修改人 Draw	核准 Approve
------------	----------------------	------------	-------------	---------------

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating  
3.0A/contact terminal
2. 额定电压: Voltage Rating  
30V DC
3. 接触阻抗: Contact Resistance  
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:  
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:  
1000MEGA ohms MIN

物理性能: Mechanical:


1. 插拔力: Connector Mate and Unmate Force  
Mate force: 3.57kgf (MAX)  
Unmate force: 1.02kgf (MIN)

原材料: Material:

1. 塑胶 Housing:  
Hing Temperature Ternmaplastics,
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;  
Tin On Solder Talls
2. 外壳: Shell:  
铜壳四周镀30U" (MIN) 锡  
Nickel Plating

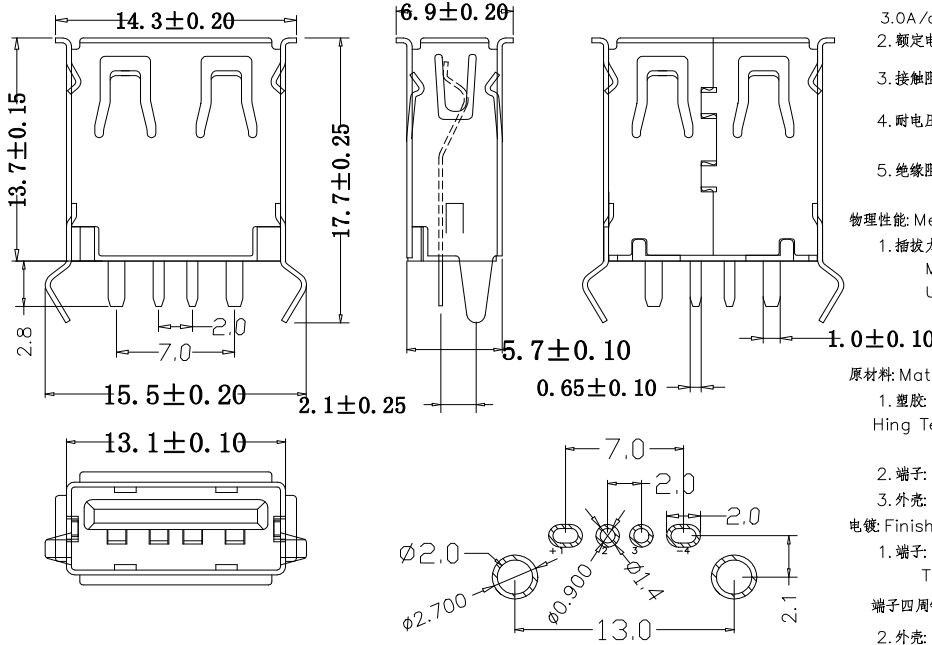

成品图 MANUFACTURING DRG		深圳市金航标电子有限公司		WWW.BDS666.COM	
公差一览表 TOLERANCE (UNLESS OTHERWISE)		KH-AF180WJ-13.7JB-DA		0755-83044319	
.X±0.20	X.±5°	日期 DATE	2016.10.20	单位 UNIT	mm
.XX±0.10	.X±2°	审核 CHECKED		比例 SCALE	1:1
.XXX±0.02	.XX±1°	核准 APPROVE		设计 DESIGN	LIUFU
				品名 NAME	13.7卷边弯脚
				版本 VER	A0
				页码 SHEET	002